





Description

Double Timer Relay DC 24V
Delay ON 2sec / Delay OFF 45sec
TYPE D

Part Number:

DTR-200-004-00-20A

Outline Dimensions

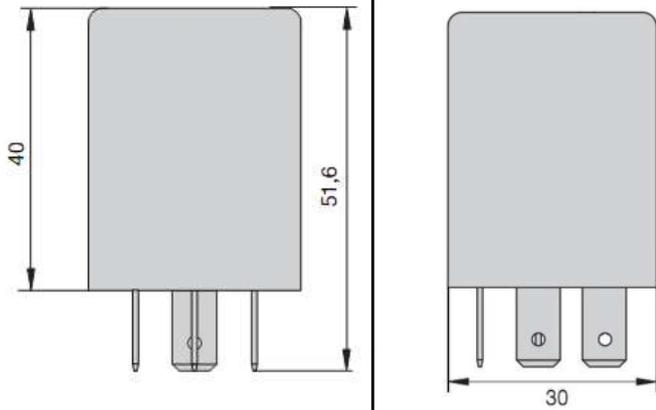


2, 4, 5, 6 and 8
blade terminals 6.3 x 0.8


footprint
to ISO 7588

Pin Configuration

Wiring Diagram : Type D

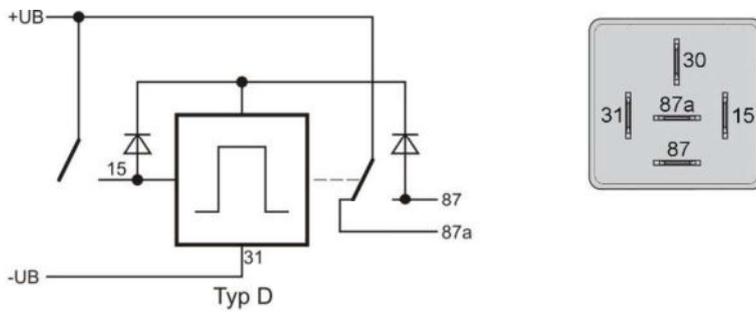

Function Diagram

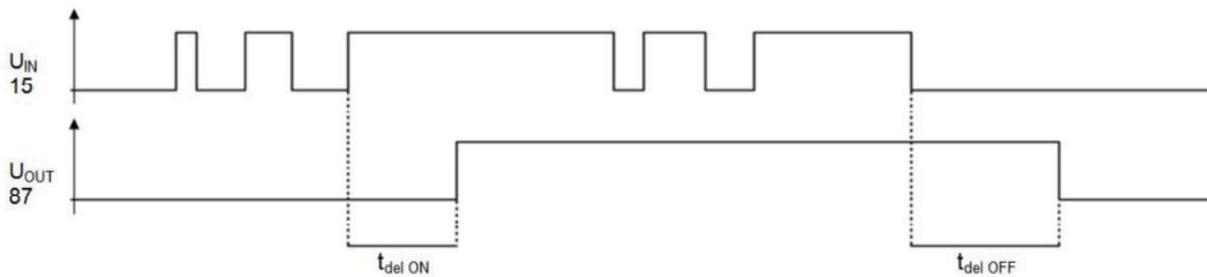

Characteristics

Nominal Voltage	U _N	DC 24V	Time Tolerance		± 5%
Operating Voltage	U _{OP}	DC 18V ... 30V	Nominal Current	I _N	NO: 20A / NC: 10A Change Over
Operating Current	I _{OP}	0mA / 100mA	Operational Temperature		-40°C...+85°C
Delay ON	t _{del ON}	2sec	Life Time		100.000 switches
Delay OFF	t _{del OFF}	45sec			

Materials

Baseplate	PA66-GF30	Terminals	Cu Zn 37 F37
Cap	PA66-GF30		

Additional Data

In conformity with :	ISO 7588 - ISO 8092	EMC DIN 40839	EMC 95/54 EG
-----------------------------	---------------------	---------------	--------------

PRO 04.80

REV 00 18/03/2015

Produced by : F.Roncoroni
Date : 24/08/2015

Verified by :
Date :